

A0/A30/A60 | 46-CFR**SPECIFICATIONS**

Frame	16GA. Cold-rolled steel
Door	16GA. 1 3/4-in thick
Paint	Prime painted
Hinges	Stainless Steel Sealed Ball-bearings
Insulation	Marine Mineral Wool
Lock	Cylindrical Lock Grade 1 with 3/4-in Latch Projection

OPTIONS

Door Types	F; G; N; V; RV; HP
Frame	14GA. 10GA. Z Frame K. D. Drywall Frame
Paint	Baked Enamel
Stainless Steel	Type 316L ASTM A240 / A240M
Galvanized Steel	ASTM A653/A653M-A60
Vision Panel	Keralite FR-L Fire-Rated Glazing
Hinge	Stainless Steel Continuous Pin and Barrel w/SS Bearings
Lock	Mortised Lock with 3/4-in Latch Projection
Bullet Resistant	UL-752 Level 1 – 10 plus Shotgun NIJ 0108.01 Level I – IV ASTM F1233 HG1 – SH2 MIL – SAMIT (part 1 & 2)
Blast Resistant	DSL B-1; DSL B-2 DSL B-3; and DSL B-4
Customizations	Stainless Steel Panic Device Hardware, Features, and Weather-tight Applications

* Some options are mutually exclusive

CERTIFICATIONS

DeanSteel certifies the doors are manufactured in accordance with:

46 CFR 72.05-25
46 CFR 116.435
NVIC 9-97, CH-1

DeanSteel Manufacturing Company
931 S. Flores Street
San Antonio, TX 78204


P 800.825.8271
F 210.226.0913
www.DeanSteel.com




**MADE IN AMERICA
AND VETERAN OWNED**




Door Types

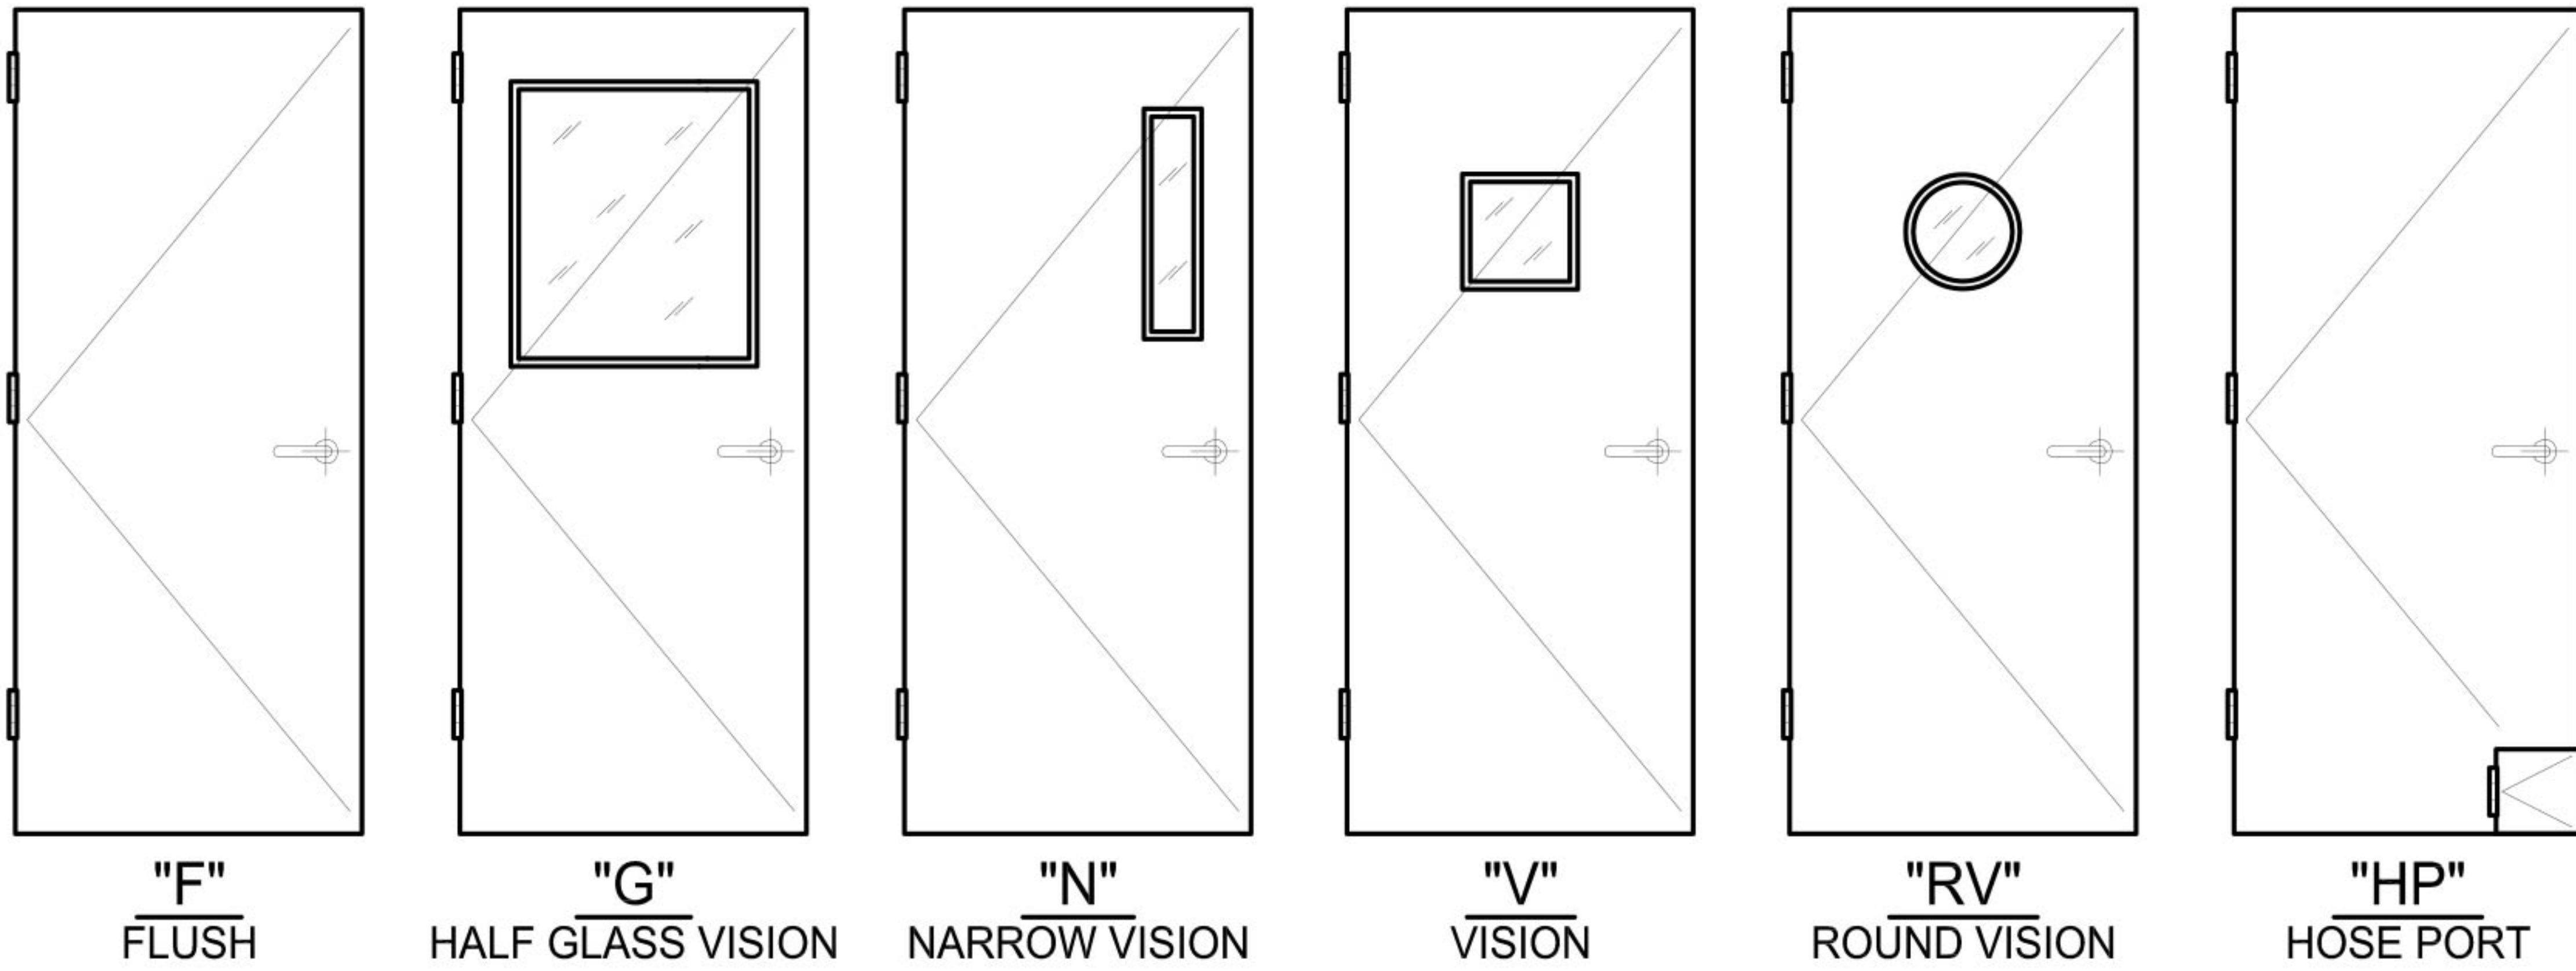

Frame Elevations

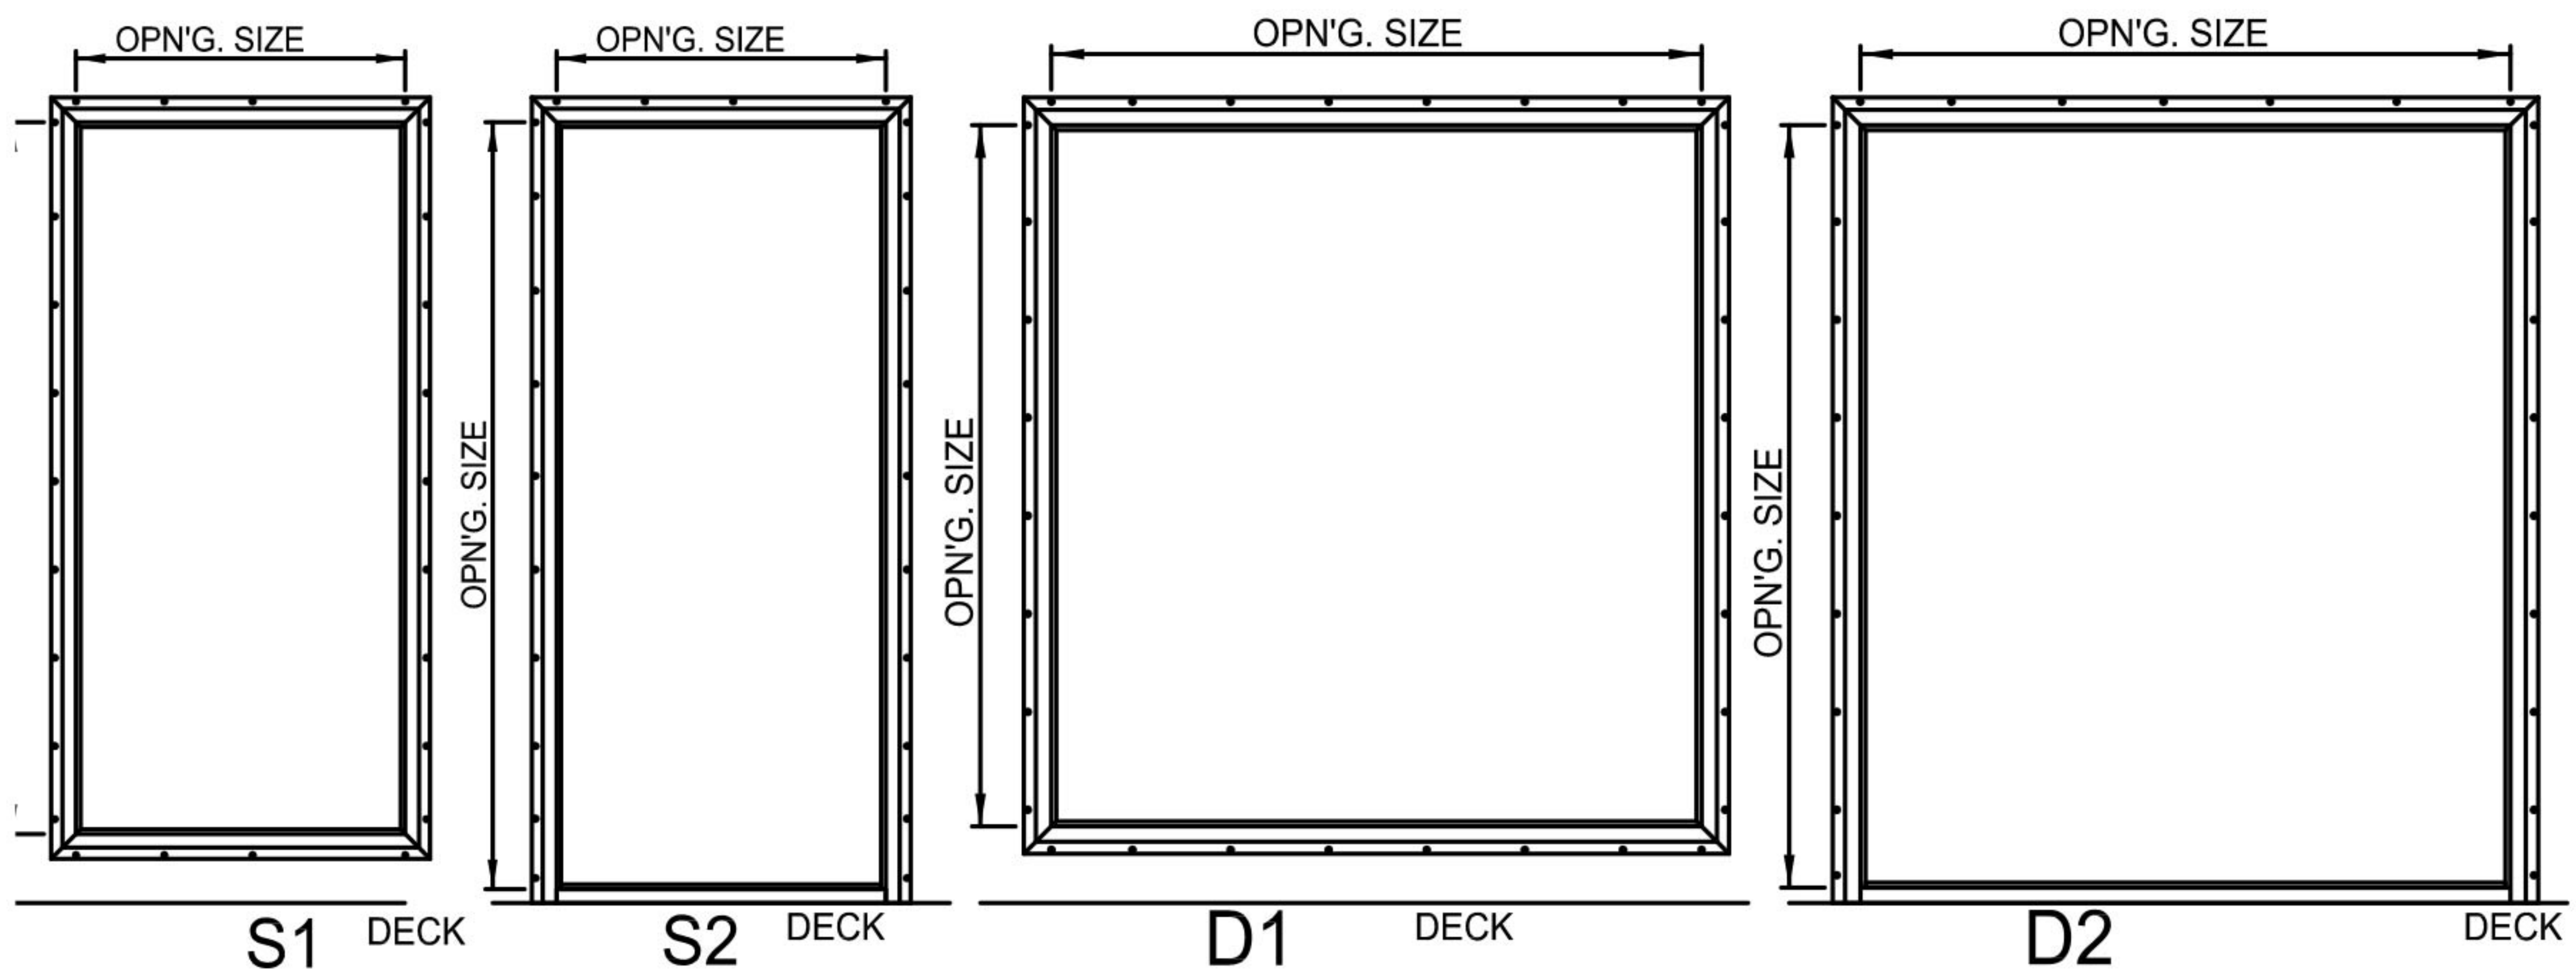

Frame Types

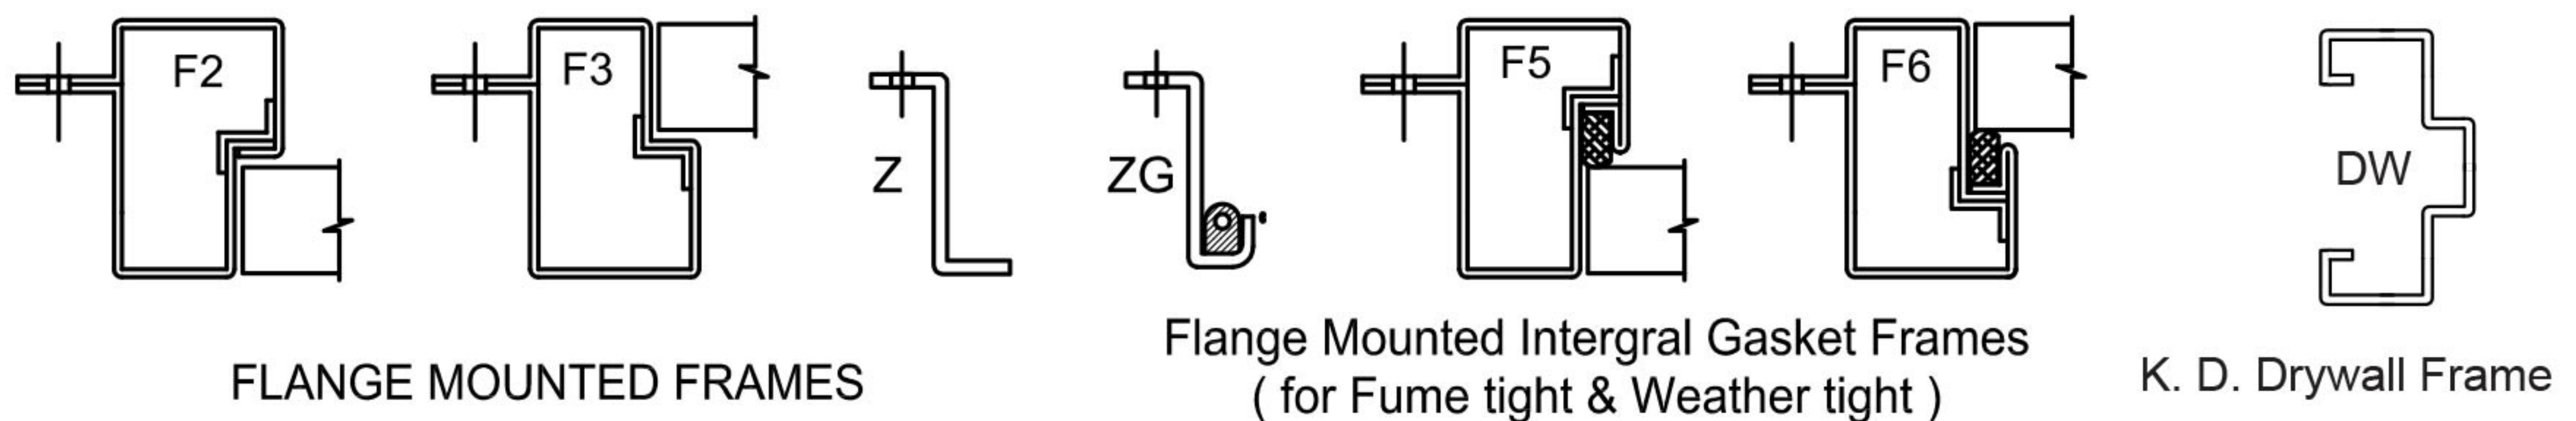

SINGLE DOORS				PAIR of DOORS			
INSIDE				INSIDE			
F2 or F5 IN SWING ONLY		INSIDE		F2 or F5 IN SWING ONLY		INSIDE	
RIGHT HAND RH	LEFT HAND LH	RIGHT HAND ACTIVE LH ASTRAGAL	LEFT HAND ACTIVE RH ASTRAGAL	RIGHT HAND RH ACT	LEFT HAND LH ACT	RIGHT HAND ACTIVE RH ASTRAGAL	LEFT HAND ACTIVE LH ASTRAGAL
INSIDE				INSIDE			
F3 or F6 OUT SWING ONLY		INSIDE		F3 or F6 OUT SWING ONLY		INSIDE	
RIGHT HAND REVERSE RHR	LEFT HAND REVERSE LHR	RIGHT HAND REVERSE ACTIVE RH ASTRAGAL	LEFT HAND REVERSE ACTIVE LH ASTRAGAL	RIGHT HAND RHR ACT	LEFT HAND LHR ACT	RIGHT HAND REVERSE ACTIVE RH ASTRAGAL	LEFT HAND REVERSE ACTIVE LH ASTRAGAL

NOTE: ALWAYS USE THE KEY SIDE OF THE DOOR FOR REFERENCE