

# A60

IMO

## SPECIFICATIONS

---

<b>Frame</b>	14 GA. Stainless Steel
<b>Door</b>	14 GA. 2 1/8-in thick ASTM Type 304
<b>Paint</b>	Prime painted
<b>Hinges</b>	Stainless Steel Sealed Ball-bearings
<b>Insulation</b>	Fire Rated Marine
<b>Lock</b>	Mortised Lock (single) 3-Point Mortised Lock (Pair)

## OPTIONS

---

<b>Door Types</b>	F; V; N
<b>Frame</b>	10GA. Z Frame
<b>Paint</b>	Baked Enamel / Powder Coat
<b>Stainless Steel</b>	Type 316L ASTM A240 / A240M
<b>Finish</b>	Matte
<b>Vision Panel</b>	Contraflam
<b>Hinge</b>	Stainless Steel Continuous Pin and Barrel w/SS Bearings
<b>Lock</b>	3 Point Mortise (Single) Stainless Steel Panic Device
<b>Customizations</b>	Size, Hardware, Features, and Weather-tight Applications



## CERTIFICATIONS

---

U.S.C.G. #164.136/116/0


DeanSteel Manufacturing Company  
931 S. Flores Street  
San Antonio, TX 78204

P 800.825.8271  
F 210.226.0913  
www.DeanSteel.com




MADE IN AMERICA  
AND VETERAN OWNED

## Door Types

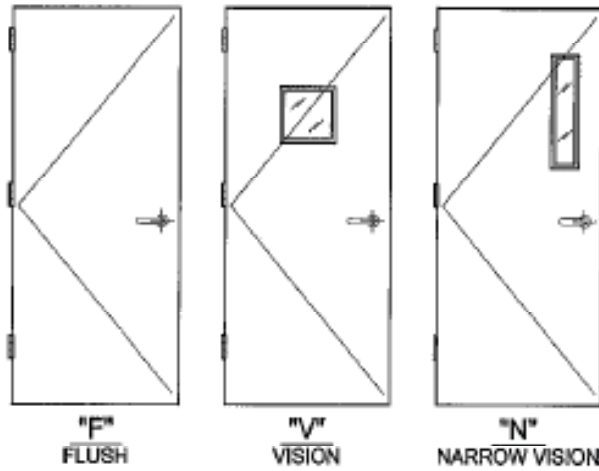

## Frame Elevations

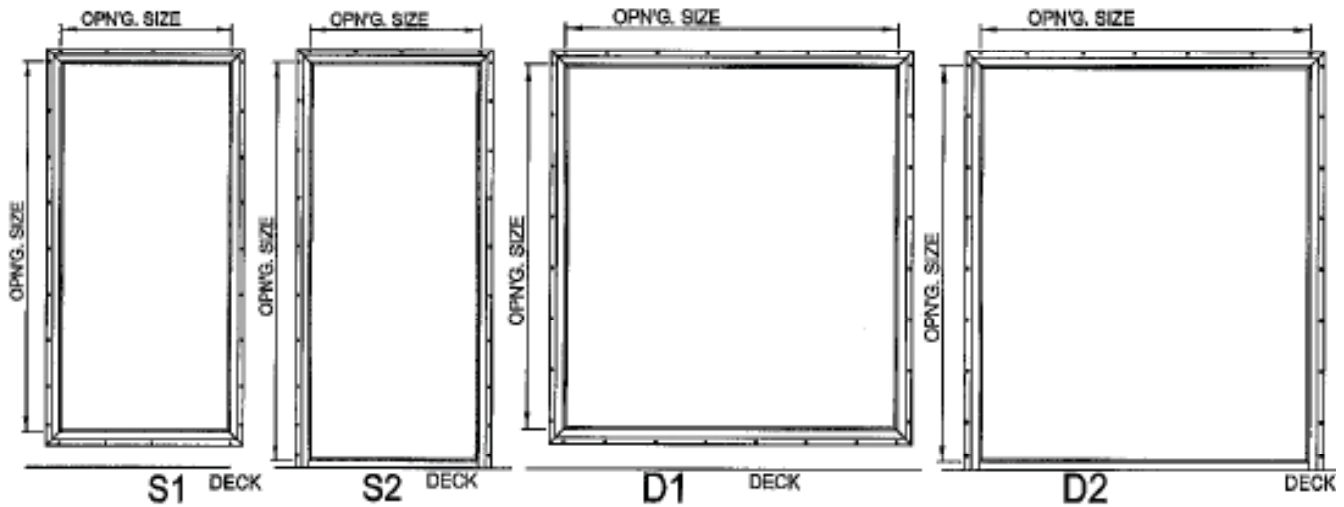

## Frame Types



FLANGE MOUNTED FRAMES

Flange Mounted Integral Gasket Frames ( for Fume tight & Weather tight )

SINGLE DOORS				PAIR of DOORS			
INSIDE		INSIDE		INSIDE		INSIDE	
F2 or F5 IN SWING ONLY		F2 or F5 IN SWING ONLY		F2 or F5 IN SWING ONLY		F2 or F5 IN SWING ONLY	
RIGHT HAND RH	LEFT HAND LH	RIGHT HAND ACTIVE RH ASTRAGAL	LEFT HAND ACTIVE LH ASTRAGAL	RIGHT HAND ACTIVE RH ACT	LEFT HAND ACTIVE LH ACT	RIGHT HAND REVERSE RHR	LEFT HAND REVERSE LHR
INSIDE		INSIDE		INSIDE		INSIDE	
F3 or F6 OUT SWING ONLY		F3 or F6 OUT SWING ONLY		F3 or F6 OUT SWING ONLY		F3 or F6 OUT SWING ONLY	
RIGHT HAND REVERSE RHR	LEFT HAND REVERSE LHR	RIGHT HAND REVERSE ACTIVE RH ASTRAGAL	LEFT HAND REVERSE ACTIVE LH ASTRAGAL	RIGHT HAND REVERSE ACTIVE RHR ACT	LEFT HAND REVERSE ACTIVE LHR ACT	RIGHT HAND REVERSE RHR	LEFT HAND REVERSE LHR

NOTE: ALWAYS USE THE KEY SIDE OF THE DOOR FOR REFERENCE